


MODEL	RATING	ELEMENT SPLIT	
		II	I
DFC1200	1200W 230-240V	650W	550W
DFC1500	1500W 230-240V	800W	700W
DFC2000	2000W 230-240V	1100W	900W

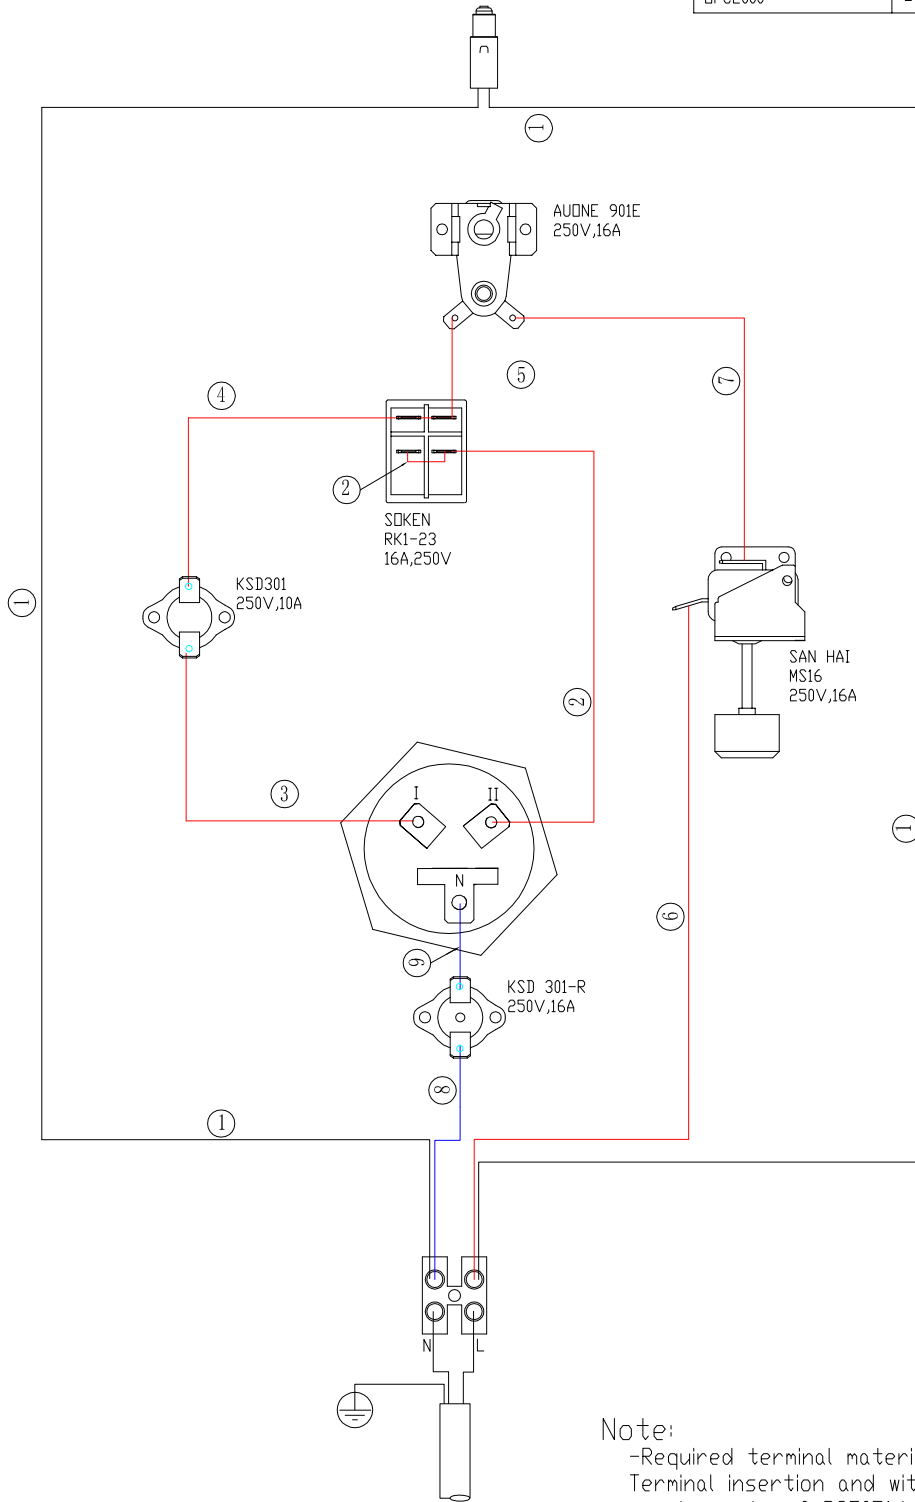

Note:
 -Required terminal material: Nickel Plated Steel Terminal insertion and withdrawal force to meet requirements of BS5051/ IEC 760
 -Wire lengths & terminal orientation/type to be confirmed by Cuori

ISSUE	MODIFICATIONS	APP'D	DATE	NOTES	GLEN DIMPLEX RESEARCH & DEVELOPMENT				THIS DRAWING IS SUPPLIED IN CONFIDENCE AND THE COPYRIGHT THEREOF IS THE PROPERTY OF GLEN DIMPLEX; IT MUST NOT BE USED BY A THIRD PARTY WITHOUT PRIOR PERMISSION. ©2006	
A	RELEASE FOR SAMPLING	DF	18/11/08	All wires to be 1.0mm ² Neon function: Mains On Tolerance on all wire lengths +/-5mm	Dunleer, Co.Louth, Ireland. Tel: 041 9800204. Fax: 041 6851464.				PROJECT GDA - DFC 1200,1500,2000	
					DRAWN BY	DATE	SCALE	HOLE TOL	GEN TOL	TITLE
					DF	18/11/08		+/-0.05	0 +/-0.4	WIRING DIAGRAM
					APP'D BY	DATE	DIM IN	ANGLES	0,0 +/-0.2	ND. OFF.
							mm	+/-0.5'	0,00+/-0,1	
				DO NOT SCALE IF IN DOUBT ASK	R.o.H.S. All material must comply with the requirements of European Directive 2002/95/EC on the restriction of the use of certain hazardous substances.				DRG NO	A4
				THIRD ANGLE PROJECTION					0/11581/0	Sht 1 of 1