



LOGAIRE
The family fire.

MODEL

TALISMAN

INSTALLATION SPECIFICATION SHEET



These instructions must be used in conjunction with the 'General Installation Instructions' for LOGAIRE wood fires.

CLEARANCE REQUIREMENTS

This fire has been tested to the Australian/New Zealand Standard AS/NZS 2918:2001 and all installations must be in accordance with the minimum clearances to combustibles indicated in these instructions.

The minimum clearances to combustables may be reduced if the combustible walls are shielded with an approved non-combustable material. Details of suitable materials and appropriate clearance reduction factors are present in Section 3 of AS/NZS 2918:2001.

POSITIONING YOUR FREE-STANDING WOODFIRE

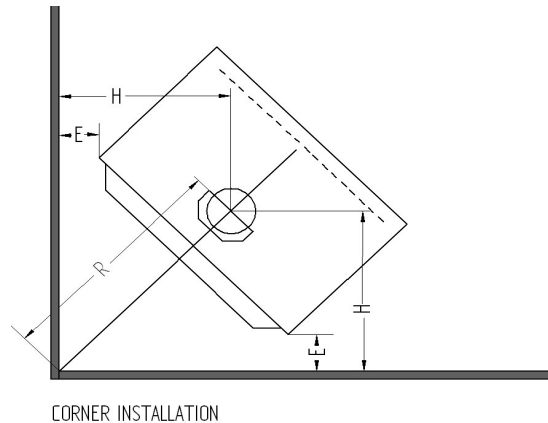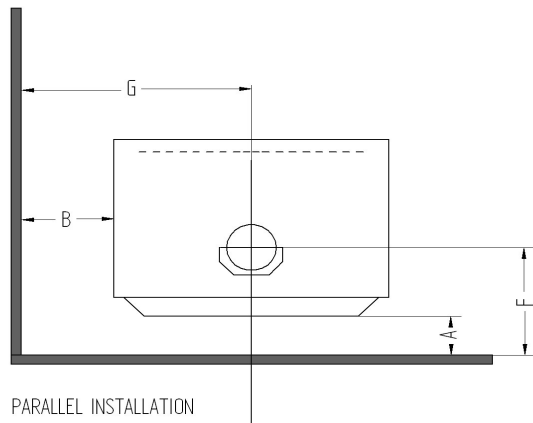

NEW ZEALAND

MINIMUM DISTANCES TO HEAT SENSITIVE WALLS (mm)

MODEL	FLUE HEAT SHIELD	A	B	E	F	G	H	R§
Talisman	LOGAIRE SINGLE SKIN S/S POL. 1200mm	125	325	150	276	675	494	698
	WITHOUT FLUE SHIELD	500	450	350	651	800	694	981

AUSTRALIA

MINIMUM DISTANCES TO HEAT SENSITIVE WALLS (mm)

MODEL	FLUE HEAT SHIELD	A	B	E	F	G	H	R§
Talisman	FLOWMET SUPER SINGLE FLUE KIT	200	300	225	351	650	569	804
	ACORN FLUE KIT & SHIELD 900mm	150	325	200	301	675	544	769
	STATEWIDE FLUE KIT & SHIELD 1000mm	245	380	325	396	730	669	945

§ Valid only when the room walls are at 90° to each other.

‡ Note: Clearances are for fire hazard only. For durability of finishes or surfaces you should contact the relevant manufacturer for their specification. Glen Dimplex Australasia Ltd accepts no responsibility for the deterioration of surfaces or finishes.


See " INSTALLING THE FLUE " for recommended Australian flue systems.

PRT. NO. 594658

DATE: 01.05.2010

FLOOR PROTECTOR (Hearth) REQUIREMENTS PARALLEL INSTALLATION

MINIMUM FLOOR PROTECTOR DIMENSIONS IN mm

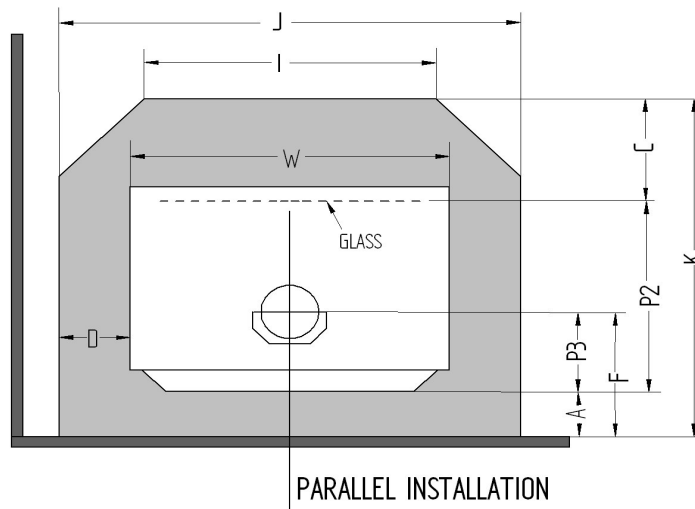

DIMENSIONS IN THE TABLE ARE VALID ONLY WHEN THE FIRE IS EXACTLEY AT ITS MINIMUM ALLOWABLE WALL CLEARANCE.

NEW ZEALAND

MODEL	Flue Shield	Floor Protector height	A#	C#	D	F	I	J	K#	P2	P3	W	Floor Protector Type Ø
Talisman	*		125	300	117	276	633	933	876	451	151	700	ASH
	**		500	300	117	651	633	933	1251	451	151	700	ASH

* Logaire single skin S/S polished 1200 mm shield

** Without flue shield

AUSTRALIA - ALL WITH FLUE HEATSHIELD

MODEL	Flue Shield	Floor Protector height	A#	C#	D	F	I	J	K#	P2	P3	W	Floor Protector Type Ø
Talisman	*		200	300	117	351	633	933	951	451	151	700	ASH
	**		150	300	117	301	633	933	901	451	151	700	ASH
	***		245	300	117	396	633	933	996	451	151	700	ASH
	*	FLOWMET SUPER SINGLE FLUE KIT											
	**	ACORN FLUE KIT & SHIELD 900mm											
	***	STATEWIDE FLUE KIT & SHIELD 1000mm											


Ø for minimum constructional requirements see general installation instructions.

Valid only when the fire is exactly at its minimum allowable wall clearance.

NOTE: Where a fan is being fitted, you may prefer to increase the 'A' dimension to 100 mm to provide easier access for servicing. If so, the amount you add to 'A' to bring it to 100 mm must also be added to the 'C' and 'S' dimensions.

FLOOR PROTECTORS (Hearth) REQUIREMENTS CORNER INSTALLATION

MINIMUM FLOOR PROTECTOR DIMENSIONS IN mm

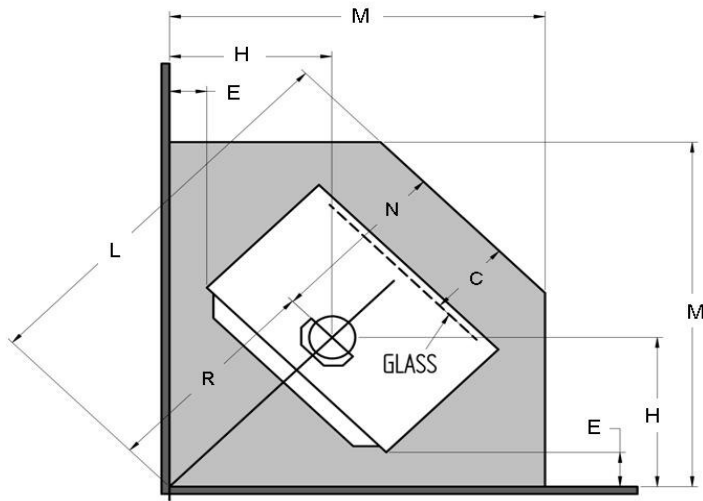

DIMENSIONS IN THE TABLE ARE VALID ONLY WHEN THE FIRE IS EXACTLEY AT ITS MINIMUM ALLOWABLE WALL CLEARANCE.

NEW ZEALAND

MODEL	Flue Shield	Floor Protector Distance above Floor	C	E	H#	L#	M#	N	R#	FLOOR PROTECTOR TYPE
Talisman	*		300	150	494	1298	1141	600	698	ASH
	**		300	350	694	1581	1341	600	981	ASH


* Logaire single skin S/S polished 1200 mm shield

** Without flue shield

AUSTRALIA


MODEL	Flue Shield	Floor Protector Distance above Floor	C	E	H#	L#	M#	N	R#	FLOOR PROTECTOR TYPE
Talisman	*		300	225	569	1404	1216	600	804	ASH
	**		300	200	544	1369	1191	600	769	ASH
	***		300	325	669	1545	1316	600	945	ASH
	*	FLOWMET SUPER SINGLE FLUE KIT								
	**	ACORN FLUE KIT & SHIELD 900mm								
	***	STATEWIDE FLUE KIT & SHIELD 1000mm								

FREE STANDING FIRE DIMENSIONS

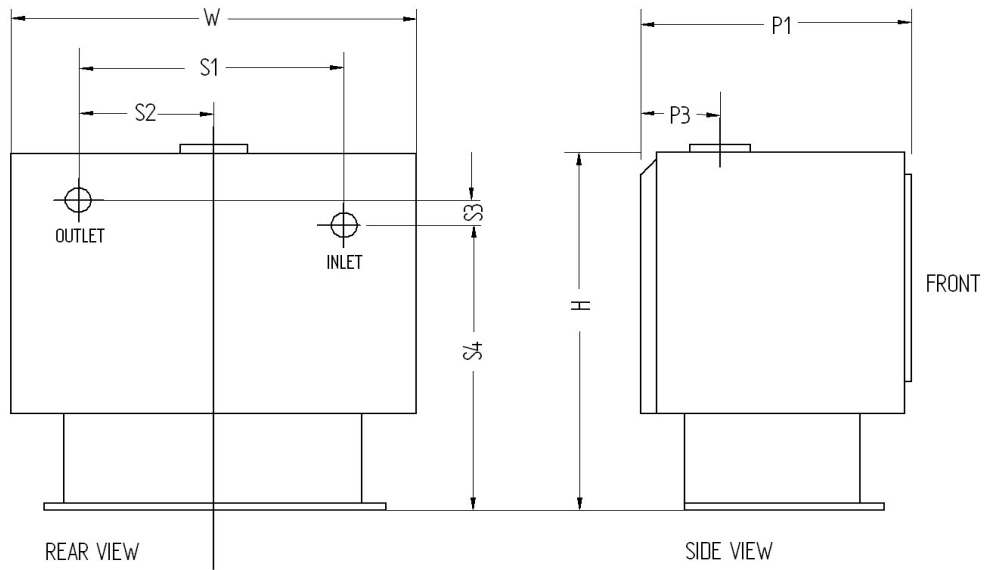

MODEL		P1	P3	H	W	S1	S2	S3	S4
Talisman		465	151	724	700	N/A	N/A	N/A	N/A

FLUE SYSTEM INSTALLATION

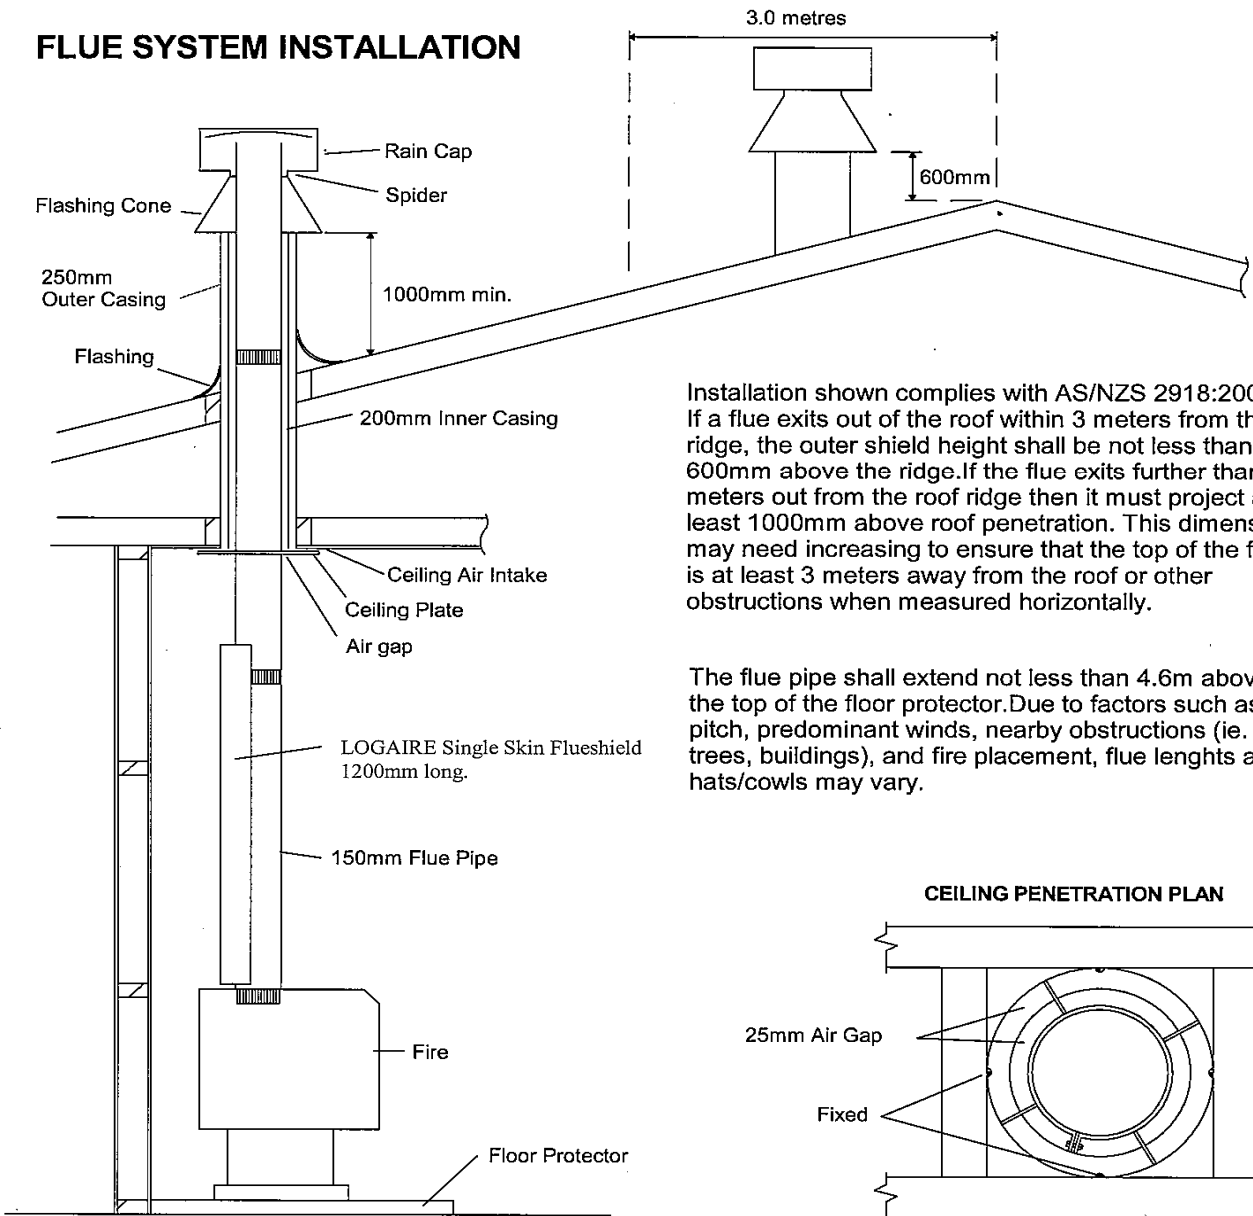

Installation shown complies with AS/NZS 2918:2001. If a flue exits out of the roof within 3 metres from the ridge, the outer shield height shall be not less than 600mm above the ridge. If the flue exits further than 3 metres out from the roof ridge then it must project at least 1000mm above roof penetration. This dimension may need increasing to ensure that the top of the flue is at least 3 metres away from the roof or other obstructions when measured horizontally.

The flue pipe shall extend not less than 4.6m above the top of the floor protector. Due to factors such as roof pitch, predominant winds, nearby obstructions (ie. trees, buildings), and fire placement, flue lengths and hats/cowls may vary.

FLUE SYSTEM INSTALLATION 150mm


**THIS DIAGRAM IS VALID ONLY FOR NZ INSTALLATIONS
FOR INSTALLATIONS IN AU PLEASE REFER TO SPECIFIC FLUE INSTALLATION MANUALS.**



GLEN DIMPLEX
AUSTRALASIA LTD

TALISMAN WOOD FIRE

FIRE BOARDS AND FLUE INSTALLATION INSTRUCTIONS

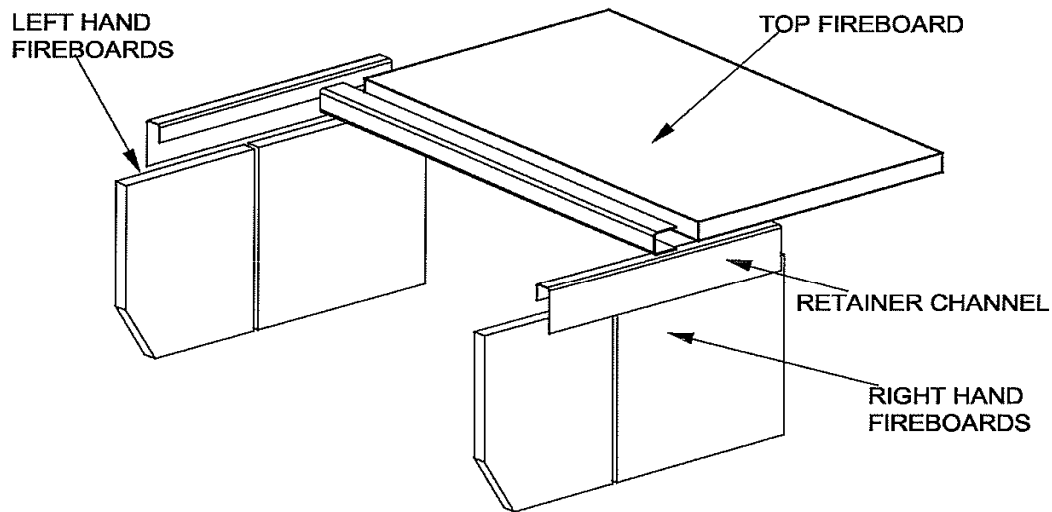

- 1) PLACE LEFT HAND FIRE BOARDS IN POSITION AND FIT CHANNEL RETAINER OVER THE TWO FIRE BOARDS.
- 2) PLACE RIGHT HAND FIRE BOARDS IN POSITION AND FIT CHANNEL RETAINER OVER THE TWO FIRE BOARDS.
- 3) PLACE TOP FIRE BOARD IN POSITION AND FIT CHANNEL RETAINER OVER THE FIRE BOARD

**BE SURE TO BURN THE WOODFIRE ON LOW HEAT
FOR 8 HOURS IN ORDER TO CURE THE FIRE BOARDS.**

594658.a.0